

Since 1959




Cranes, in all the languages of the world

Serie 3




LA FORZA DELLA QUALITÀ · THE POWER OF QUALITY
LA FORCE DE LA QUALITE · DIE KRAFT DER QUALITÄT · LA FUERZA DE LA CALIDAD


3021

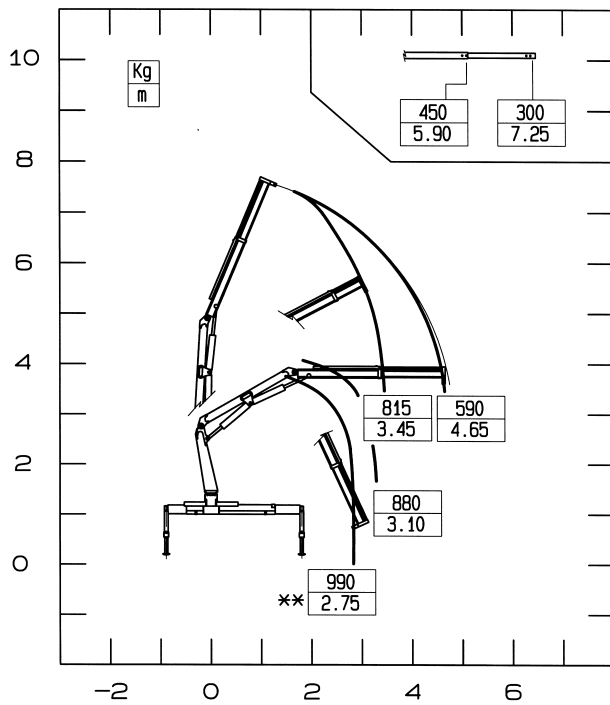

3022

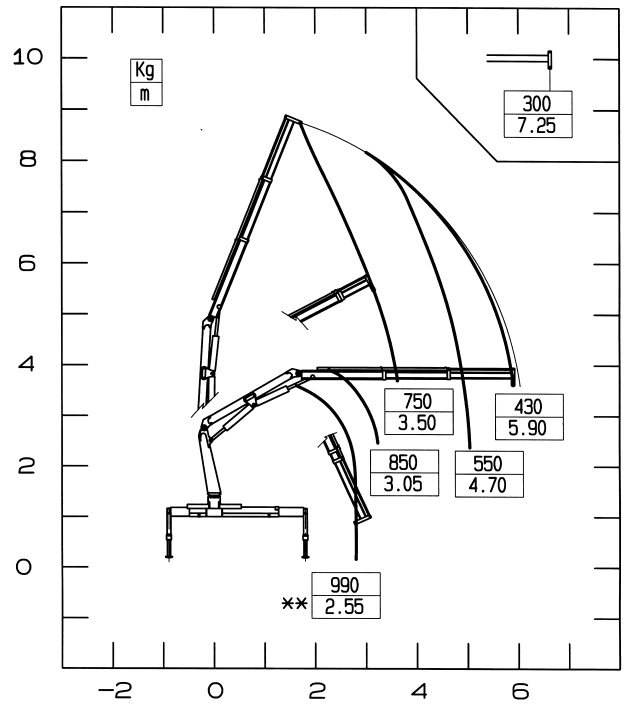

3023

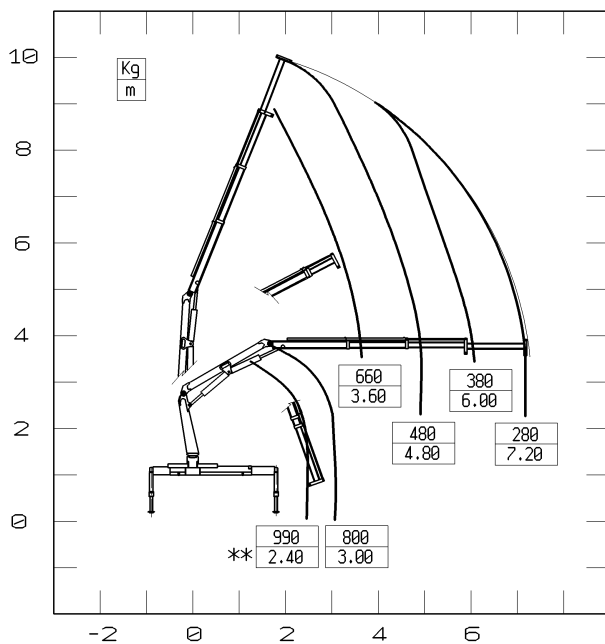

- ** Portata massima al gancio mobile
- ** Max capacity with mobile hook
- ** Capacité maxi nominale au crochet mobile
- ** Max. Tragkraft
- ** Capacidad máxima en el gancio móvil




LE GRU PM SERIE 3 SONO CONFORMI ALLE NUOVE NORME EN 12999

THE CRANE PM SERIE 3 IS CONFORM TO THE NEW NORM EN 12999

DIE KRAENE PM SERIE 3, DIE NEUE NORMEN EN 12999, ENTSPRECHEN

LES GRUES PM SÉRIE 3 SONT CONFORMES AUX NOUVELLES NORMES EN 12999

LAS GRÚAS PM SERIE 3 SON CONFORME A LAS NUEVAS NORMAS EN 12999

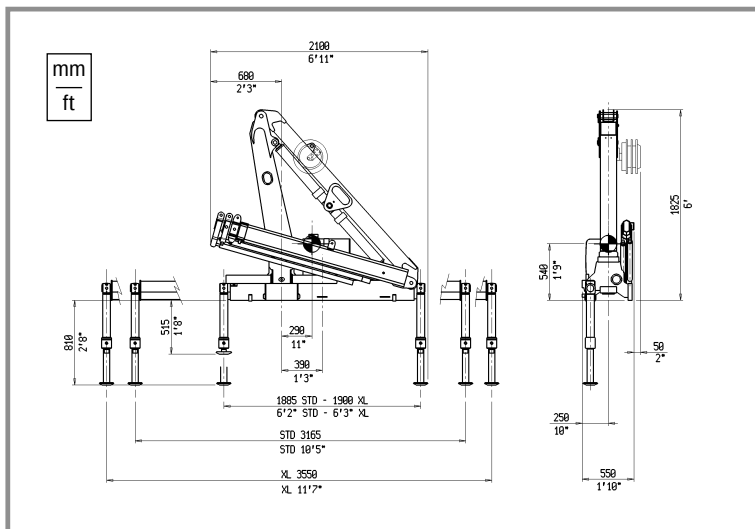

DATY TECHNIKI - TECHNISCHE DATEN - DATOS TECNICOS

DATI TECNICI - TECHNICAL DATA DONNEES TECHNIQUES - TECHNISCHE DATEN - DATOS TECNICOS		3021	3022	3023	
MOMENTO DI SOLLEVAMENTO MASSIMO <i>Maximum lifting moment - Moment de levage maxi - Max. Hubmoment - Momento de elevación máxima</i>		kNm t m	27,6 2,8	25,8 2,6	23,8 2,4
SBRACCIO OLEODINAMICO <i>Hydraulic outreach - Allongement Hydraulique - Hydraulische Reichweite - Alcance hidráulico</i>					
Orizzontale - Horizontal - Horizontal - Horizontal - Horizontal	m	4,80	6,10	7,40	
Verticale - Vertical - Vertical - Vertikal - Vertical	m	7,45	8,75	9,90	
SBRACCIO CON PROLUNGHE <i>Maximum reach with manual extension - Allongement avec rallonges manuelles - Reichweite, mit mech Verlängerungen - Alcance con prolongas manuales</i>					
Orizzontale - Horizontal - Horizontal - Horizontal - Horizontal	m	7,40	7,40	--	
Verticale - Vertical - Vertical - Vertikal - Vertical	m	9,85	9,85	--	
IMPIANTO OLEODINAMICO - Hydraulic circuit - Circuit hydraulique - Hydraulikanlage - Sistema hidráulico					
Portata raccomandata - Recommended oil flow - Débit recommandé - Empfohlene Fördermenge - Caudal requerido	l/min	10	10	10	
Pressione massima - Rated pressure - Pression maxi - Betriebsdruck - Presión máxima	MPa	25,5	25,5	25,5	
Capacità serbatoio olio - Tank capacity - Capacité du réservoir - Tankinhalt - Capacidad del depósito de aceite	l	35	35	35	
GRUPPO ROTAZIONE - Slewing system - Rotation - Schwenksystem - Sistema de giro					
Angolo di rotazione - Slewing angle - Angle de rotation - Schwenkbereich - Ângulo de giro	°	360	360	360	
Coppia di rotazione - Slewing moment - Couple de rotation - Schwenkmoment - Momento de giro	kN m	4,5	4,5	4,5	
Pendenza max di lavoro - Max. working heel - Devers maxi de travail - Max. Arbeitsneigung - Inclinación máxima de trabajo	% (°)	7(4)	7(4)	7(4)	
PESO DELLA GRU STANDARD - Standard crane weight - Poids de la grue standard - Eigengewicht Standardkran - Peso de la grúa est (*)		Kg	490	520	545

(*) Con serbatoio non rifornito - Empty oil tank - Reservoir huile non garni - Oeltank leer - Deposito de aceite vacío

CRANES, IN ALL THE LANGUAGES OF THE WORLD



TUTTE LE GRU PM SONO COPERTE DA POLIZZA ASSICURATIVA INTERNAZIONALE PER LA RESPONSABILITÀ CIVILE VERSO TERZI.

ALL PM CRANES ARE COVERED BY AN INTERNATIONAL INSURANCE POLICY FOR CIVIL LIABILITY THIRD PARTY.

TOUTES LES GRUES SONT COUVERTES PAR UNE POLICE D'ASSURANCE INTERNATIONALE DE RESPONSABILITÉ CIVILE ENVERS TIERS.

PM-KRÄNE SIND DURCH EINE INTERNATIONALE HAFTPFLICHTVERSICHERUNG GEGEN DRITTE ABGESICHERT.

TODAS LAS GRÚAS PM CUENTAN CON UNA PÓLIZA DE SEGUROS INTERNACIONAL CONTRA LAS RESPONSABILIDADES CIVILES HACIA TERCEROS.

- I dati tecnici possono essere aggiornati senza preavviso.
 - *Technical data can be revised without prior notice.*
- Les données techniques peuvent être modifiées sans préavis.
 - *Technische Änderungen vorbehalten.*
 - Reservado el derecho de modificaciones.



Autogru PM spa
via Emilia Est, 1058 - 41100 Modena - Italy
Tel. +39 059 2054711 - Fax +39 059 280747 - Export Fax +39 059 282505
www.autogrupm.com e-mail: autogrupm@autogrupm.com